

MiniXtend® HD Cable with Binderless* FastAccess® Technology

144 F, SMF-28® Ultra fiber, Single-mode (OS2)

CORNING

Corning MiniXtend® HD Cables with Binderless* FastAccess® Technology are high-density micro cables that are up to 60 percent smaller and up to 70 percent lighter than standard loose tube cables and up to 20 percent smaller than standard micro cables.

The innovative Binderless FastAccess Technology improves cable handling and reduces access time up to 70 percent while lowering risk of cable and fiber damage. MiniXtend HD cables have an SZ-stranded loose tube construction and provide high fiber counts in limited duct space in long-haul, metro and access networks.

With a low-friction PE sheath, MiniXtend HD cables are optimized for blowing into microducts. Both the buffer tubes and the fibers contained within are color-coded for quick and easy identification.

MiniXtend HD cables feature Corning® SMF-28® Ultra 200 single-mode fiber (ITU-T G.652.D and ITU-T G.657. A1): the industry's first 200 micron fiber with a 9.2 micron mode-field diameter (MFD).

** Corning's patented Binderless* FastAccess® Technology refers to the combination of a Corning FastAccess Technology jacket with an innovative technology used to bind cable construction through the manufacturing process, eliminating the use of binder yarns and waterblocking tapes.*

Features and Benefits

Binderless FastAccess® Technology

Innovative cable design that reduces cable access time up to 70 percent and lowers the risk of inadvertent fiber damage

Reduced outer cable diameter

High fiber density in microduct systems

Compact and light

CapEx-optimized installations and upgrades

Optimized for air-assisted install in microducts



Capable of long installation distances

Fully-dielectric

No grounding required

Color-coded tubes and fibers

Easy identification of tubes and fibers

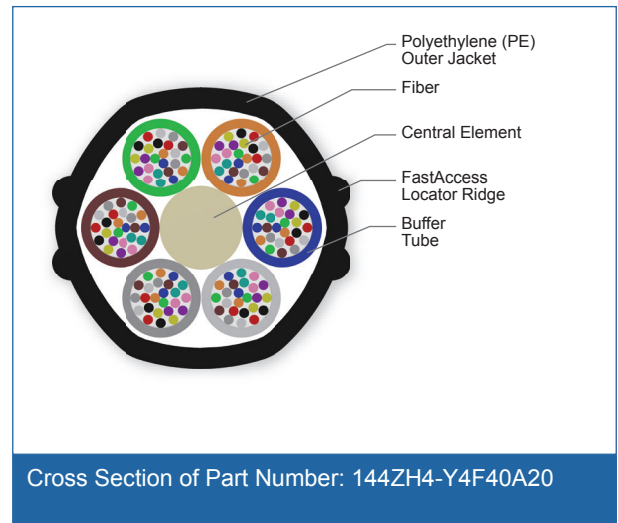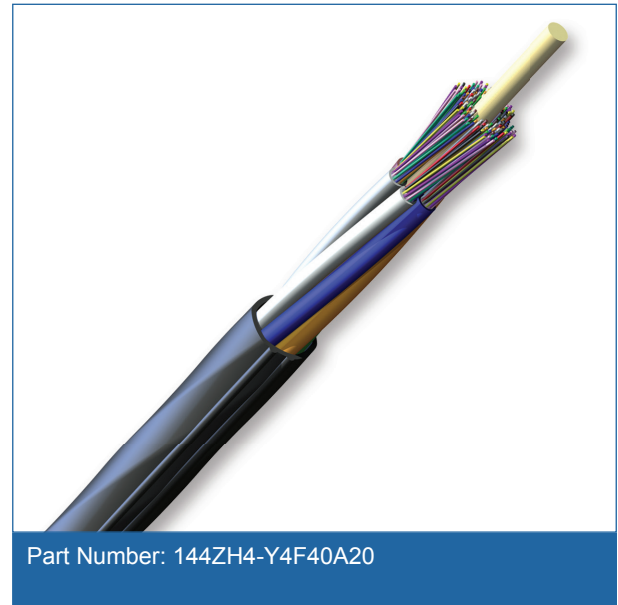

MiniXtend® HD Cable with Binderless* FastAccess® Technology

144 F, SMF-28® Ultra fiber, Single-mode (OS2)

CORNING

Features and Benefits

SMF-28® Ultra 200 fiber

ITU-T G.652.D and G.657.A1-compliant 200 micron single-mode fiber with a 9.2 micron MFD, low loss and enhanced bend performance

Specifications

General Specifications	
Environment	Outdoor
Application	Microduct
Cable Type	Stranded Loose Tube
Product Type	Dielectric
Fiber Category	SMF-28® Ultra 200 Optical Fiber
Classification ITU-T	G.652.D & G.657.A1
Recommended inner diameter of microduct	8 mm

Temperature Range	
Installation	-15 °C to 60 °C (5 °F to 140 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)
Storage	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design	
Central Element	Dielectric
Fiber Count	144
Fiber Bundle Coloring	1-12: blue, orange, green, brown, slate, white, red, black, yellow, violet, rose, aqua 13-24 (all with one black ring mark): blue, orange, green, brown, slate, white, red, natural, yellow, violet, rose, aqua
Fibers per Tube	24
Number of Tube Positions	6
Number of Active Tubes	6
Buffer Tube Color Coding	Blue, Orange, Green, Brown, Slate, White
Buffer Tube Diameter	1.7 mm (0.07 in)
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black
Outer Jacket Nominal Thickness	0.5 mm (0.02 in)

MiniXtend® HD Cable with Binderless* FastAccess® Technology

144 F, SMF-28® Ultra fiber, Single-mode (OS2)

CORNING

Mechanical Characteristics Cable

Nominal Outer Diameter	6.3 mm (0.25 in)
Weight	37 kg/km (25 lb/1000 ft)
Min. Bend Radius Installation	126 mm (5.0 in)
Min. Bend Radius Operation	95 mm (3.7 in)
Max. Tensile Strength, Short-Term	1334 N (300 lbf)
Water penetration (0.1bar/24 h)	≤ 1 m

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Name	SMF-28® Ultra 200 Optical Fiber
Fiber Category	G.652.D/G.657.A1
Fiber Code	Z
Performance Option Code	40
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.34 dB/km / 0.34 dB/km / 0.20 dB/km
Typical Attenuation	0.32 dB/km / 0.32 dB/km / 0.18 dB/km

Notes: 1) Contact a Corning Customer Care Representative for additional information.

Ordering Information

Part Number	144ZH4-Y4F40A20
Product Description	MiniXtend® HD Cable with Binderless* FastAccess® Technology, 144 F, SMF-28® Ultra fiber, Single-mode (OS2)

Shipping Information

Maximum Delivery Length	6,000 m
-------------------------	---------

MiniXtend® HD Cable with Binderless* FastAccess® Technology

144 F, SMF-28® Ultra fiber, Single-mode (OS2)

The CORNING logo is displayed in white, uppercase letters within a solid blue square.

Notes



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks.

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2019 Corning Optical Communications. All rights reserved.